Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

MOC3030, MOC3031, MOC3032, MOC3033

OPTICALLY COUPLED BILATERAL SWITCH LIGHT ACTIVATED ZERO VOLTAGE CROSSING TRIAC

Jameco Part Number 26294

DESCRIPTION

The MOC303_ Series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a monolithic silicon detector performing the functions of a zero crossing bilateral triac mounted in a standard 6 pin dual-in-line package.

FEATURES

- Options :-
  10mm lead spread - add G after part no.
  Surface mount - add SM after part no.
  Tape&reel - add SMT&R after part no.
- High Isolation Voltage ($5.3kV_{RMS}$,$7.5kV_{PK}$)
- Zero Voltage Crossing
- 250V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

Dimensions in mm

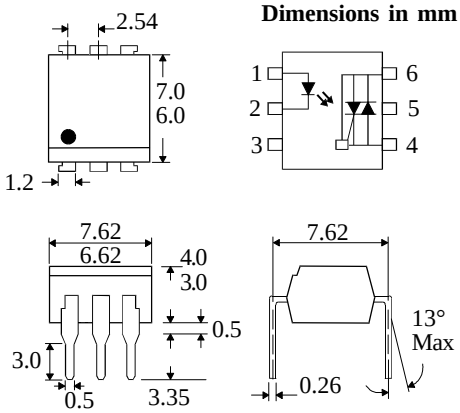

ABSOLUTE MAXIMUM RATINGS
(25 °C unless otherwise noted)

Storage Temperature	-40°C - +150°C
Operating Temperature	-40°C - +100°C
Lead Soldering Temperature (1.6mm from case for 10 seconds)	260°C
Input-to-output Isolation Voltage (Pk) (60 Hz , 1sec. duration)	7500 Vac

INPUT DIODE

Forward Current	50mA
Reverse Voltage	6V
Power Dissipation (derate linearly 1.41mW/°C above 25°C)	120mW

OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage	250V
RMS Forward Current	100mA
Forward Current (Peak)	1.2A
Power Dissipation (derate linearly 1.76mW/°C above 25°C)	150mW

POWER DISSIPATION

Total Power Dissipation (derate linearly 2.94mW/°C above 25°C)	250mW

OPTION SM
SURFACE MOUNT



OPTION G



ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax :(01429) 863581

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
http://www.isocom.com

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F) Reverse Current (I_R)		1.2	1.5 100	V µA	I_F = 30mA V_R = 6V
Output	Peak Off-state Current (I_{DRM}) Peak Blocking Voltage (V_{DRM}) On-state Voltage (V_{TM}) Critical rate of rise of off-state Voltage (dv/dt)	 250 100	 1.8	300 3.0	nA V V V/µs	V_{DRM} = 250V (note 1) I_{DRM} = 300nA I_{TM} = 100mA (peak)
Coupled	Input Current to Trigger (I_{FT})(note 2) MOC3030 MOC3031 MOC3032 MOC3033 Holding Current , either direction (I_H) Input to Output Isolation Voltage V_{ISO}	 5300 7500	 100	 30 15 10 5 	 mA mA mA mA µA V_{RMS} V_{PK}	 V_{TM} = 3V (note 2) See note 3 See note 3
Zero Crossing Charact--eristic	Inhibit Voltage (V_{IH}) Leakage in Inhibited State (I_S)			35 500	V µA	I_F = Rated I_{FT} MT1-MT2 Voltage above which device will not trigger I_F = Rated I_{FT} V_{DRM} = 250V off-state

Note 1. Test voltage must be applied within dv/dt rating.
Note 2. Guaranteed to trigger at an I_F value less than or equal to max. I_{FT}, recommended I_F lies between Rated I_{FT} and absolute max. I_F.
Note 3. Measured with input leads shorted together and output leads shorted together.

RMS On-state Current vs. Ambient Temperature

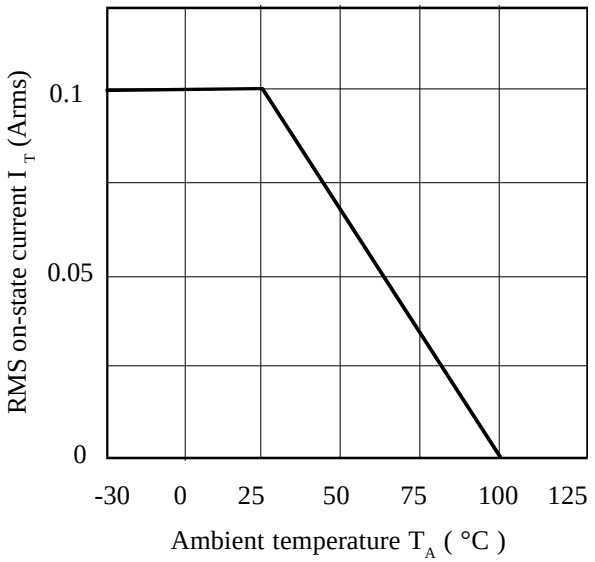

Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature

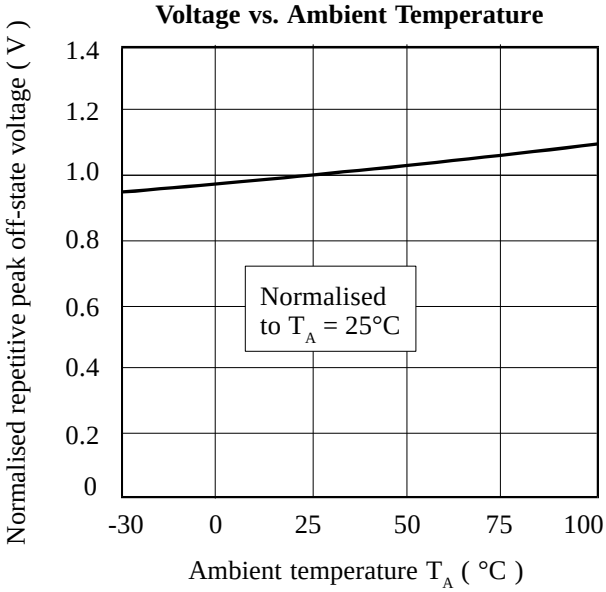

Forward Current vs. Ambient Temperature

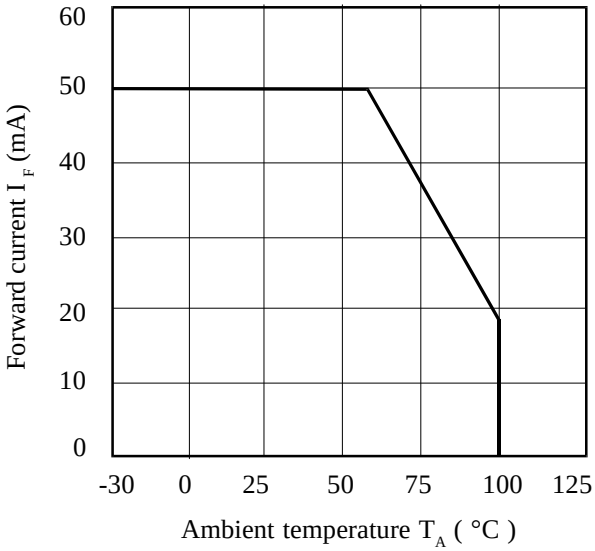

On-state Voltage vs. Ambient Temperature

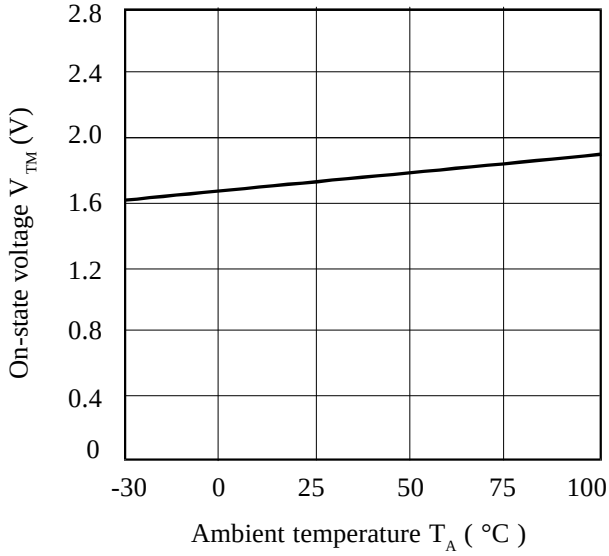

Normalised Input Trigger Current vs. Ambient Temperature

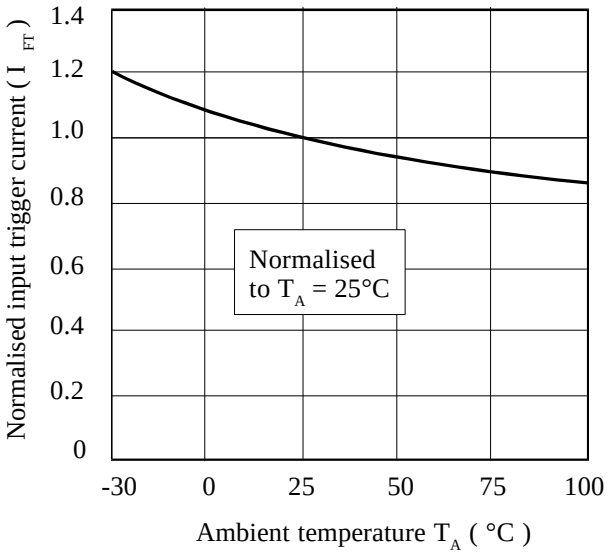

On-state Current vs. On-state Voltage